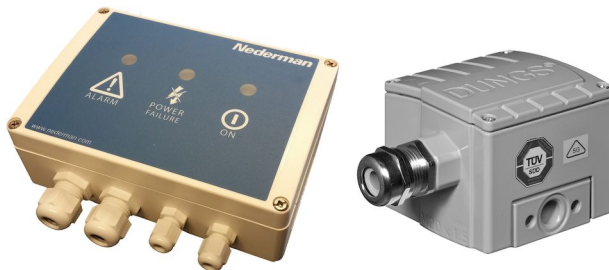


## Airflow Alarm EX

Airflow Alarm is a product for continuous air flow system monitoring



The Airflow Alarm is connected to the fan starter, assuring that it automatically starts with the fan. It then monitors the pressure conditions in the duct during the operation.

When the air pressure is outside the preset limits, an alarm is triggered and an amber LED light is activated. The lights are powerful enough to have good visibility at a distance.

The Airflow Alarm consist of control box, pressure switch, hose, inline filter, cable gland and 9V battery.

The pressure switch can be installed in ATEX zone 2/22. The control box shall not be installed in an ATEX zone.





Installing this product in an extraction system:

- Assures optimal usage of system and secured functionality.
- Support the customer with their responsibility on air quality.
- Comply with Health and Safety legal requirements and recommendations.
- Continuous service and maintenance for prolonging system length of life.

<b>Product name</b>	Airflow Alarm EX
<b>Protection class</b>	IP54 for control box, IP65 pressure switch
<b>Installation</b>	Indoor
<b>Ambient temperature range</b>	0 - 50 C (32 F to 122 F)
<b>Further technical data</b>	Power supply: 85-230V AC, 50-60Hz  Fuse: Max 13A  Pressure switch: External contact < 100 Ohm  12 VDC out alarm: +12 VDC max 200 mA  Pressure switch installation in ATEX zone 2 / 22
<b>Dimensions</b>	320 x 185 x 80 mm
<b>Weight (kg)</b>	1,5 + 0,7
<b>Note</b>	Temperature range - 15 < Ta < +70 Deg. C., Input separated by double isolation, Aluminium die casting casing, ATEX marking: II3G Ex nC IIB T6 Gc (Gas) II3D Ex tc IIIB T75°C Dc (Dust)



# Airflow Alarm EX

Image	Description	Capacity	Model
	Airflow alarm EX 40	40 - 300 Pa	40780438*
	Airflow alarm EX 100	100 - 1 000 Pa	40780439*
	Airflow alarm EX 250	250 - 5 000 Pa	40780440*
	Airflow alarm EX 3000	3 000 - 15 000 Pa	40780441*

\*Temperature range - 15 < Ta < +70 Deg. C., Input separated by double isolation, Aluminium die casting casing, ATEX marking: II3G Ex nC IIB T6 Gc (Gas)  
II3D Ex tc IIIB T75°C Dc (Dust)

# Airflow Alarm EX



Airflow alarm and pressure switch mounted

1) Pressure switch

2) Airflow Alarm