

## Bench Top Extraction Kits

Nederman Bench Top Extraction kits provide a quick and convenient solution for creating a fume-free workplace.


















The Bench Top extraction kits includes arm(s) with hood or nozzle, fan with speed control and standard filter (particle, HEPA or gas), hose, connection details, and table bracket. The speed of the fan is variably controlled by a speed controller. Complete with hoses and extraction hoods. The hood is made of clear plastic, which increases the visibility.








Product name	Bench Top Extraction Kits
No of phases	1




# Bench Top Extraction Kits

Image	Description	Power Voltage (V)	Frequency (Hz)	Electric plug	Weight (kg)	Power (kW)	Model
	EK2000 kit includes 1 x FX50, Max airflow 100 m3/h	100	50	Without	14	0,17	70506844
	EK500 kit includes 1 x FX32, Max airflow 45 m3/h	240	50 / 60	Euro (CEE 7/2 P+E)	11	0,12	70507944
	EK500 kit includes 1 x FX32, Max airflow 45 m3/h	240	50 / 60	UK	11	0,12	70508544
	EK500 kit includes 1 x FX32, Max airflow 45 m3/h	115	60	US	11	0,12	70509144
	EK1000 kit includes 2 x FX32, Max airflow 42 m3/h	240	50 / 60	Euro (CEE 7/2 P+E)	13	0,12	70508044
	EK1000 kit includes 2 x FX32, Max airflow 42 m3/h	240	50 / 60	UK	13	0,12	70508644
	EK1000 kit includes 2 x FX32, Max airflow 42 m3/h	115	60	US	13	0,12	70509344
	EK1000 kit includes 2 x FX32, Max airflow 42 m3/h	240	50	Without	13	0,12	70509544
	EK1500 kit includes 3 x FX32, Max airflow 38 m3/h	240	50 / 60	Euro (CEE 7/2 P+E)	15	0,12	70508144
	EK1500 kit includes 3 x FX32, Max airflow 38 m3/h	240	50 / 60	UK	15	0,12	70508744
	EK1500 kit includes 3 x FX32, Max airflow 38 m3/h	115	60	US	15	0,12	70509244
	EK1500 kit includes 3 x FX32, Max airflow 38 m3/h	240	50	Without	15	0,12	70509644
	EK2000 kit includes 1 x FX50, Max airflow 100 m3/h	220 - 240	50 / 60	Euro (CEE 7/2 P+E)	14	0,12	70507644
	EK2000 kit includes 1 x FX50, Max airflow 100 m3/h	220 - 240	50 / 60	UK	14	0,12	70508244
	EK2000 kit includes 1 x FX50, Max airflow 100 m3/h	115	60	US	14	0,12	70508844

# Bench Top Extraction Kits

Image	Description	Power Voltage (V)	Frequency (Hz)	Electric plug	Weight (kg)	Power (kW)	Model
	EK2500 kit includes 2 x FX50, Max airflow 75 m3/h	220 - 240	50 / 60	Euro (CEE 7/2 P+E)	17	0,12	70507744
	EK2500 kit includes 2 x FX50, Max airflow 75 m3/h	220 - 240	50 / 60	UK	17	0,12	70508344
	EK2500 kit includes 2 x FX50, Max airflow 75 m3/h	115	60	US	17	0,12	70508944
	EK3000 kit includes 1 x FX75, Max airflow 150 m3/h	240	50 / 60	Euro (CEE 7/2 P+E)	15	0,12	70507844
	EK3000 kit includes 1 x FX75, Max airflow 150 m3/h	240	50 / 60	UK	15	0,12	70508444
	EK3000 kit includes 1 x FX75, Max airflow 150 m3/h	115	60	US	15	0,12	70509044
	EK2000 kit includes 1 x FX50, Max airflow 100 m3/h	240	50	Without	14	0,12	70509444

# Bench Top Extraction Kits

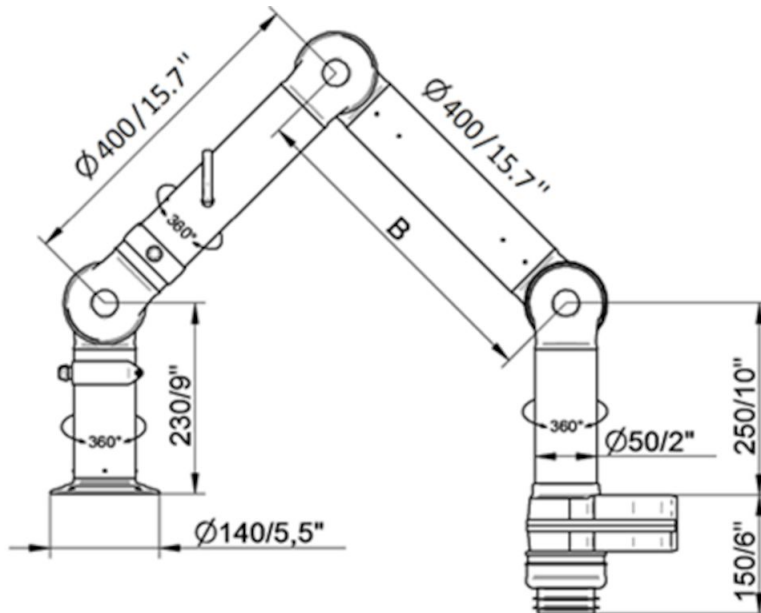

EK 2000

Arm(s): 1 x FX2 50 arm

Hood(s): 1 x combination hood

Hose: Ø 50 mm (2 inch), 3000 mm (118 inch) length

Max. airflow: 100 m<sup>3</sup>/h (58.8 cfm)

EK 2500


Arm(s): 2 x FX2 50 arm

Hood(s): 2 x mini hood

Hose: Ø 50 mm (2 inch), 3000 mm (118 inch) length

Max. airflow: 75 m<sup>3</sup>/h (44 cfm)

# Bench Top Extraction Kits

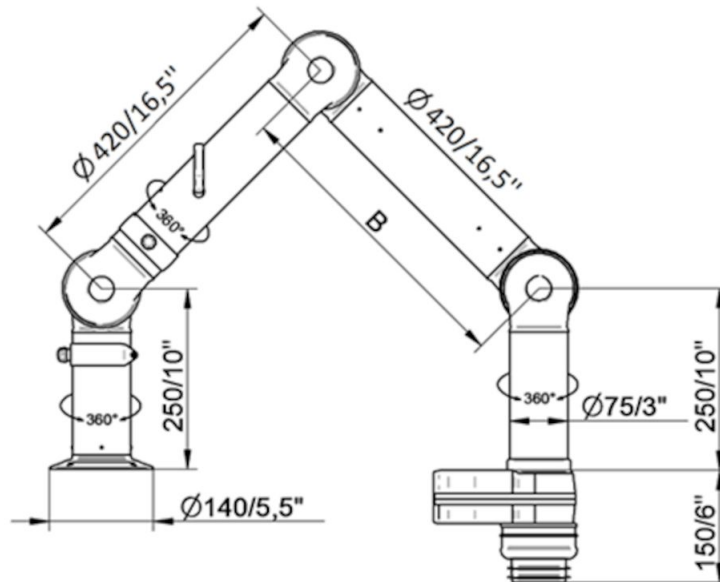

EK 3000


Arm(s): 1 x FX2 75 arm

Hood(s): 1 x mini hood

Hose: Ø 75 mm (3 inch), 3000 mm (118 inch) length

Max. airflow: 150 m<sup>3</sup>/h (88.3 cfm)

# Bench Top Extraction Kits

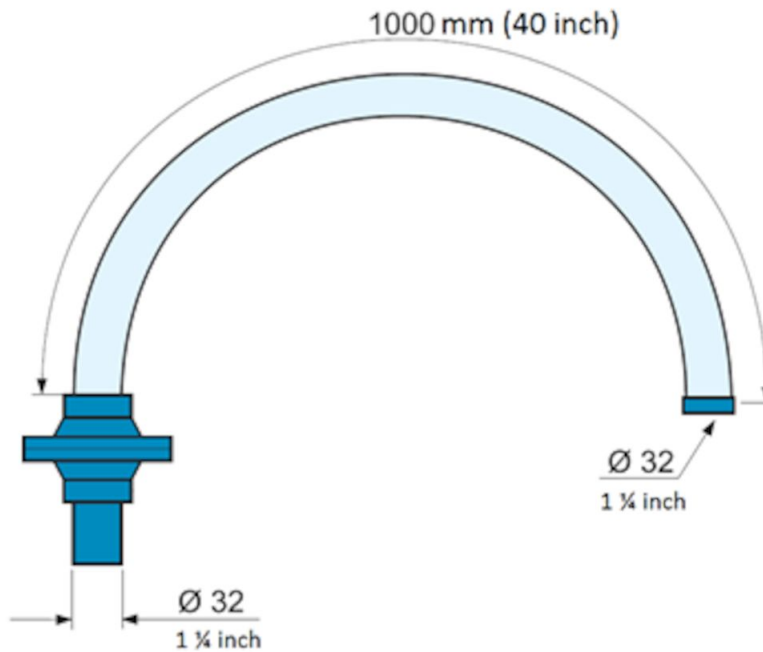

## EK 500

Arm(s): 1 x FX 32 arm

Hood(s): 1 x dome hood ½

Hose: Ø 45 mm (1 ¼ inch), 3000 mm (118 inch) length

Max. airflow: 45 m<sup>3</sup>/h (26.5 cfm)

## EK 1000

Arm(s): 2 x FX 32 arm

Hood(s): 2 x dome hood ½

Hose: Ø 45 mm (1 ¼ inch), 3000 mm (118 inch) length

Max. airflow: 42 m<sup>3</sup>/h (25 cfm)

## EK 1500

Arm(s): 3 x FX 32 arm

Hood(s): 3 x dome hood 1/2

Hose: Ø 45 mm (1 ¼ inch), 3000 mm (118 inch) length

Max. airflow: 38 m<sup>3</sup>/h (22.4 cfm)