

Extraction Arm NEX S Ø160

Extraction arm that fulfills all requirements for use in environments containing explosive dust and gas, and with extremely high hygienic demands.



The NEX S arm fulfills all requirements for use in environments containing explosive dust and gas, and with extremely high hygienic demands. It has a double earthed system and antistatic earthed ventilation hose that prevents static electricity and sparks. Open support arm system and hood of acid proofed polished stainless steel requires a minimum of maintenance and makes it easy to clean. The NEX S is not marked with the EX symbol since it does not fall under the scope of the directive 2014/34/EU. Even if it does not have the EX marking, it is highly suitable for use in zones 1/21, 2/22 according to ATEX-work directive 1999/92/EC. The arm is double earthed, by the helix in the hose and through the arm system. The hose is made of antistatic Polyurethane.

- **Minimum maintenance**
- **Easy to clean**
- **Double earthed**
- **Flexible arm, easy to position**
- **Recommended for use in explosive environments, zone 1/21, 2/22**





Product name	Extraction Arm NEX S Ø160
Noise level (dB(A))	65-71
Installation	Indoor
Fume temperature	Max 70°C (158 F)
Extraction arm diameter (mm)	160
Airflow (m3/h)	1700
Colour	




Extraction Arm NEX S Ø160

Description	Arm length (m)	Weight (kg)	Model
Extractor arm Nex stainless	2	20	10521232
Extractor arm Nex stainless	3	17	10521332
Extractor arm Nex stainless	4	24	10521432
Extractor arm Nex stainless with damper	2	20	10521532
Extractor arm Nex stainless with damper	3	17	10521632
Extractor arm Nex stainless with damper	4	24	10521732

Extraction Arm NEX S Ø160

	Accessory	Part No
	Extension set 0,6m Nex S	10512232
	Hose PE-EL 160/2m black	10374423
	Hose PE-EL 160/3m black	10374424
	Hose PE-EL 160/4m black	10374425
	Hose PE-EL 160/5m black	10374426

Extraction Arm NEX S Ø160

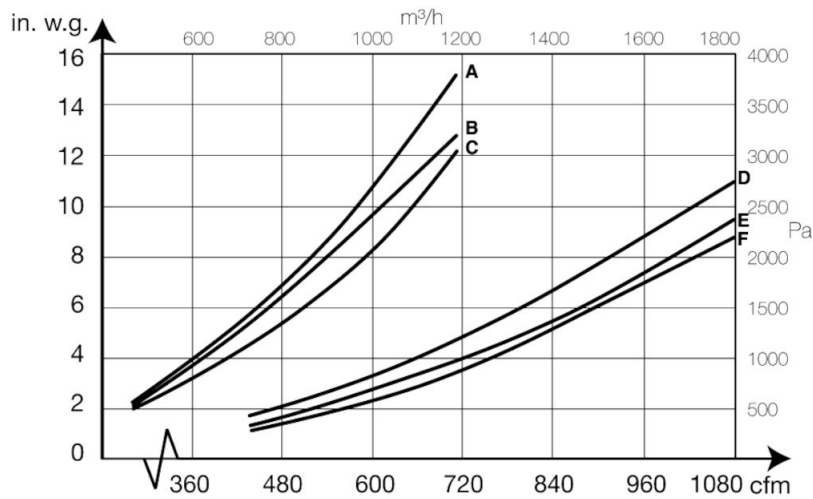

X: airflow m³/h Y: static pressure Pa A= 4 m Ø125 mm, B= 3 m Ø125 mm, C= 2 m

Ø125 mm, D= 4 m Ø160 mm, E= 3 m Ø160 mm, F= 2 m Ø160 mm

